Keep Your Drilling Floor Clear of Hazardous Gases and Unwanted Bugs

BUG BLOWERS

UNION SUPPLIES

50" Bug Blowers

MODELS AVAILABLE:

- 230 VOLTS
- 480 VOLTS
- 575 VOLTS

FEATURES:

- Extra Heavy-Duty Steel Frame
- Available in Stainless Steel
- UL Certified 'XP' 5HP Motor and Starter
- 48" Cast Aluminum Impeller (See Chart)
- Mobile: Forklift Accessable / Lift Eye
- 40,000 CFM / 1200 RPM
- Color: Safety Yellow Standard

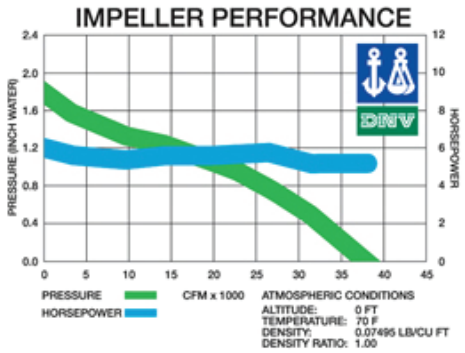

DIMENSIONS:

- 76" HIGH x 62" WIDE x 33" DEEP

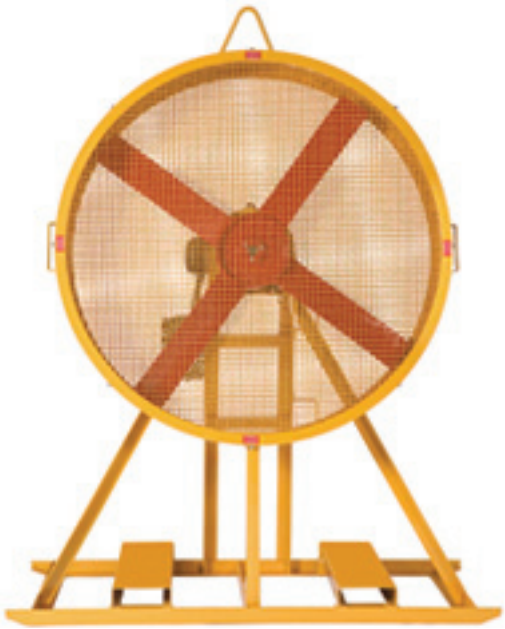

POWER CABLING EXTRA

Available with extra cable wired to the starter with no plug (open end cable). Cable length available up to 250 feet. Recommended cable type is SOOW/MSHA listed; 600 volts; extra hard usage and resistant to oil, water and weather; cable size 10/4; 230, 460 or 575V, 90º C.

50” Stainless Steel Bug Blower

FEATURES:

- Extra Heavy-Duty Steel Frame
- Available in Stainless Steel
- UL Certified ‘XP’ 5HP Motor and Starter
- 48” Cast Aluminum Impeller (See Chart)
- Mobile: Forklift Accessable / Lift Ey
- 40,000 CFM / 1200 RPM

MODELS AVAILABLE:

- 230 VOLTS
- 480 VOLTS
- 575 VOLTS

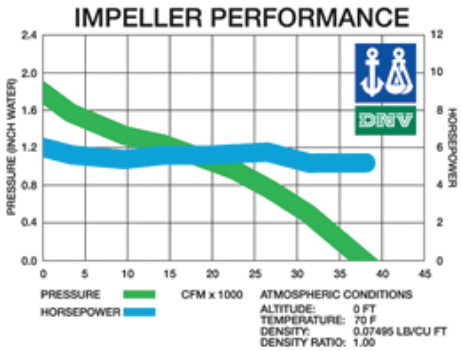

DIMENSIONS:

- 76” HIGH x 62” WIDE x 33” DEEP

POWER CABLING EXTRA

Available with extra cable wired to the starter with no plug (open end cable). Cable length available up to 250 feet. Recommended cable type is SOOW/MSHA listed; 600 volts; extra hard usage and resistant to oil, water and weather; cable size 10/4; 230, 460 or 575V, 90º C.

24" Bug Blowers

MODELS AVAILABLE:
- 230 VOLTS
- 480 VOLTS
- 575 VOLTS

ROTATES
360º Horizontally
135º Vertically

FEATURES:
- Extra Heavy Duty Mild Steel Frame
- 2HP UL Certified 'XP' Motor, AC 3PH
- UL Certified 'XP' Starter
- Cast Aluminum Impeller
- 5000 CFM
- All Exposed Bolts Safety Wired
- Color: Safety Yellow
- Weight: 400 lbs. Total Kit
- Pre-Drilled Railing Mount
- Removable Fork Lift Feet
- Hand Holds / Cable Wrap
- Lock-In-Position
- 30"H Swivel Railing Pipe
- All Hardware Included
- Cleans Easily

DIMENSIONS:
- RAILING: 68"H x 43"W x 15"D
- FLOOR: 35"H x 43"W x 15"D

POWER CABLING EXTRA
Available with extra cable wired to the starter with no plug (open end cable). Cable length available up to 250 feet. Recommended cable type is SOOW/MSHA listed; 600 volts; extra hard usage and resistant to oil, water and weather; cable size 10/4; 230, 460 or 575V, 90º C.

24” Stainless Steel Bug Blower

ROTATES
360º Horizontally
135º Vertically

MODELS AVAILABLE:
- 230 VOLTS
- 480 VOLTS
- 575 VOLTS

FEATURES:
- Extra Heavy Duty Mild Steel Frame
- 2HP UL Certified ‘XP’ Motor, AC 3PH
- UL Certified ‘XP’ Starter
- Cast Aluminum Impeller
- 5000 CFM
- All Exposed Bolts Safety Wired
- Color: Bare Metal or Safety Yellow
- Weight: 400 lbs. Total Kit
- Pre-Drilled Railing Mount
- Removable Fork Lift Feet
- Hand Holds / Cable Wrap
- Lock-In-Position
- 30”H Swivel Railing Pipe
- All Hardware Included
- Cleans Easily

DIMENSIONS:
- RAILING: 68”H x 43”W x 15”D
- FLOOR: 35”H x 43”W x 15”D

POWER CABLING EXTRA
Available with extra cable wired to the starter with no plug (open end cable). Cable length available up to 250 feet. Recommended cable type is SOOW/MSHA listed; 600 volts; extra hard usage and resistant to oil, water and weather; cable size 10/4; 230, 460 or 575V, 90º C.

Baylor Brakes
Bearings
Bug Blowers
Control Gear
Couplings
Drilling Motors
Electrical Products
Electric Motors
Gearboxes
Heater Tapes
Hydraulic Components
Interfaces
Motor Control Centres
Motor Slide Rails/Slide Base
LED Lighting
Pumps
Sensors
Transformers
Transmission Equipment
Variable Speed Drives
Vibrator Motors

Industry knowledge, competitive pricing, professional service, fast turnaround and global distribution

www.unionsupplies.com

Union Supplies
Blackness Road
Aberdeen
AB12 3LH

T: +44 (0) 1224 897755
F: +44 (0) 1224 877121
sales@unionsupplies.com
www.unionsupplies.com

Aberdeen
Baku
Dubai
Houston

UNION SUPPLIES