




- Excellent heat dissipation and noiselessness with ultra-quiet fan
- Concealed side lock and padlock for fast cabinet connection
- Macromolecular flexible mask with glareless surface and better contrast ratio
- High-performance metal plate cabinet with concise routing
- Sealed back cover to avoid faulty operation of the amateur

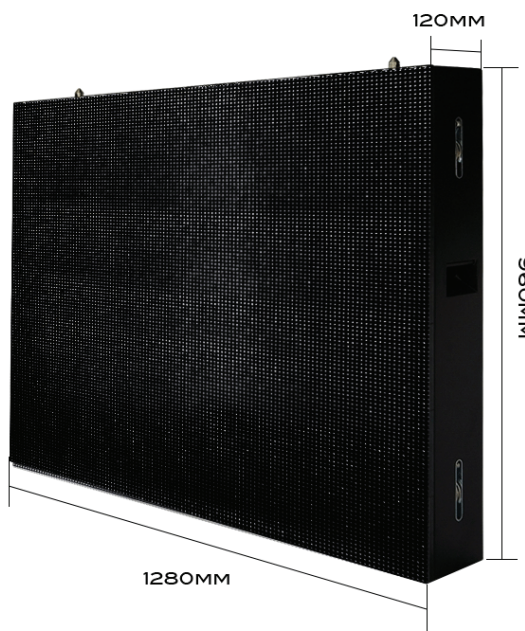

**LI Series Accessories**

Wooden Case for 2 Panels 118kg/pc  
 Industrial Pc

**LED-LI-4.0S**  
**LED-LI-6.0S**  
**LED-LI-10.0S**

**LED-LI-5.0S**  
**LED-LI-7.62S**

Item		Parameters				
<b>Modules</b>	Model	<b>LED-LI-4.0S</b>	<b>LED-LI-5.0S</b>	<b>LED-LI-6.0S</b>	<b>LED-LI-7.62S</b>	<b>LED-LI-10.0S</b>
	Pixel Pitch (mm)	4.0	5.0	6.0	7.62	10
	Physical Density (dot/m <sup>2</sup> )	62,500	40,000	27,777	17,222	10,000
	LED Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	LED Type	SMD2121	SMD3528	SMD3528	SMD3528	SMD3528
	Module Size (mm x mm)	128 x 128	160 x 160	192 x 96	244 x 122	320 x 160
	Module Resolution (PX x PX)	32 x 32	32 x 32	32 x 16	32 x 16	32 x 16
	Power Consumption (W)	13	13	13	13	45
<b>Main Technical Parameters</b>	Drive Mode:	Constant Current Drive	Constant Current Drive	Constant Current Drive	Constant Current Drive	Constant Current Drive
	Horizontal Viewing Angle (Deg)	140	140	140	140	140
	Vertical Viewing Angle (Deg)	140	140	140	140	140
	Brightness (cd/m <sup>2</sup> )	1,800	1,800	1,600	1,300	1,000
	Grey Scale	14 Bit	14 Bit	14 Bit	14 Bit	14 Bit
	Refresh Rate (Hz)	400/2,200	400/2,200	400/2,200	400/2,200	400/2,200
	Cabinet Resolution (PX x PX)	192 x 192	128 x 128	128 x 128	128 x 128	96 x 96
	Cabinet Max Power Consumption (W)	460	200	420	420	230
	Cabinet Avg Power Consumption (W)	185	88	170	170	170
	Cabinet Size (mm x mm)	768 x 768	640 x 640	768 x 768	975 x 975	960 x 960
	Cabinet Thickness (mm)	120	120	120	120	120
	Cabinet Material	Steel/Aluminium				
	Colour	281tn				
	Input Voltage	AC 110V~220V +/- 10%				
	Refresh Frame Frequency (Hz)	60				
	Protection Level	IP43				
	Working Environment	Indoor				
	Working Temperature (°C)	-20 ~ +40				
Operation Humidity (RH)	10%-90%					
Life Span (H)	100,000					
Certificates	CCC CE					